
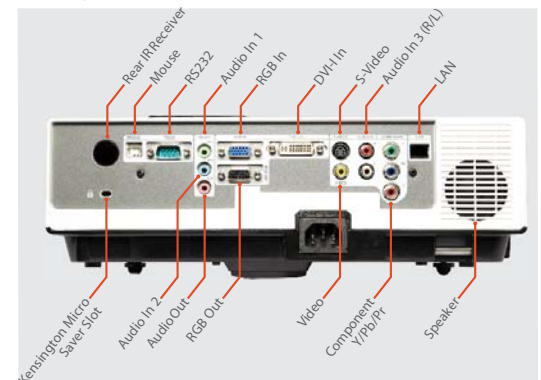


Model	SEATTLE X40N
Technology	.63" 3LCD 
Brightness	4000 Lumen (Standard) 2700 (economy mode)
Native Resolution	1024 x 768 (XGA)
Supported Resolution	up to 1600 x 1200 (UXGA)
Brightness Uniformity	78%<
Projection Methods	Desktop front/rear, Ceiling front/rear
Colors	16.7 million true color
Contrast Ratio	600:1
Aspect Ratio	Native 4:3; Compatible 16:9
Image Size	40"-300"
Projection Distance	5' to 30'
Lens Shift	N/A
Throw Ratio	1.45~1.73 (manual zoom and focus)
Zoom Ratio	1.2:1
Digital Zoom	4x zoom with Pan function
Keystone Correction	Vertical +/- 30 degrees, Auto
Horizontal Scan Rate	31 to 92kHz
Vertical Scan Rate	48 to 120Hz
Audio Output	1 x 8W mono
Lamp	230W
Lamp Life	3000/4000 (standard/economy)
Remote Control	Full Function IR remote with Laser Pointer
Noise Level	>33dB eco mode
Power Supply	Universal AC Input 100-240V at 50-60Hz
Power Consumption	310W <2.6W standby mode
Safety Certifications	FCC-B, UL, cUL,TUB, CD, CE, CCC
Computer Compatibility	UXGA, SXGA+, SXGA, XGA, SVGA, VGA Resized; VESA Standards; PC and Macintosh Compatible
Video Compatibility	EDTV (480p), HDTV (576i/p, 720p, 1080i), NTSC/NTSC4.43, PAL B/G/H/I/M/N 60, SECAM
Connectivity	VGA, DVI-I, Composite Video with 2 RCA (R/L) audio-in, Component Video, S-video, Audio 3.5mm-in x 2, LAN, RS232, USB port for mouse control, VGA and 3.5 mm outputs
Service and Network Control	RS232, RJ45
Weight	7.3 lbs
Dimensions (W x H x D)	12.8" x 10.24" x 3.8"
Operating Temperature	N/A
Security	Kensington® Lock Port, Keypad lock, Anchor security bar
Standard Accessories	AC power cord, VGA cable, USB cable, Remote Control with batteries, User manual (cd), Carrying Case




## Key Features

- Designed for tough environment
- Side changing lamp
- Side changing filter
- Quick off/on
- Advanced Anti-theft features, Kensington® lock, Keypad lock, Security Anchor bar
- Five auto features (Auto Search, Auto Sync, Auto Ceiling, Auto Keystone and Auto Filter Alert)
- Seven display modes (Natural, Cinema, Daylight, Green board, White Board, Black, Board and User)
- Built-in 8W Mono Speaker
- Logo capture
- Image freeze function
- Digital zoom adjustment up 4x
- Built in Network Control software via RJ45 (LAN) connection
- Multi Language OSD (On-Screen Display)
- Powerful 8W speaker
- Closed Caption



Throw Distance (ft)

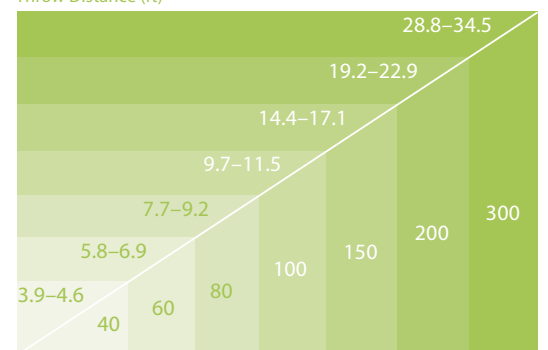

Diagonal Image Size (inches)

## Outstanding Technical Support 24/7/365

And, of course, all BOXLIGHT products all come with free lifetime technical support. Speak with a hands-on, in-house, ISF Certified® technician ready to service your projector should the need arise.

© 2011 BOXLIGHT, Inc. Specifications subject to change without notice.  
 Helps meet ADA Section 508 compliance  
 BOXLIGHT NE 151 Highway 300, Suite A PO Box 2609 Belfair, WA 98528