


SPECIFICATIONS

Model name	CP-WX3014WN	CP-X4014WN	CP-X3014WN	CP-X2514WN
Liquid crystal panel	0.59 type (inch), 1.5cm polysilicon active-matrix TFT x 3	0.63 type (inch), 1.6cm polysilicon active-matrix TFT x 3		
Number of pixels	1,024,000 pixels (H1280 x V800)	786,432 pixels (H1024 x V768)		
Resolution	1280 x 800 color pixels (WXGA)	1024 x 768 color pixels (XGA)		
Manual zoom			x1.2	
Lamp		210W UHP		
Light output (brightness)	3,000 Lumens	4,000 Lumens	3,200 Lumens	2,700 Lumens
Contrast ratio			3,000:1 (Presentation mode)	
Audio			16W mono (8W x 2)	
Keystone correction			Auto Vertical Keystone	
Power supply			AC100-120V/AC220-240V	
Operating temperature			5-35°C (41-95°F)	
Input signals	Computer input	VGA, SVGA, XGA, WXGA, WXGA+, SXGA, SXGA+, UXGA, MAC16"		
Video input		NTSC, NTSC4.43, PAL, SECAM, PAL-M, PAL-N, PAL (60Hz)	480i@60, 480p@60, 576i@50, 576p@50, 720p@50/60, 1080i@50/60, 1080p@50/60	
Input/output terminals	Video input		S-Video: Mini Din 4-pin x 1, Composite video: RCA jack x 1, Component video: RCA jack x 3	
Audio input			Stereo Mini jack x 2, RCA jack x 2 (L/R)	
Computer input			Analog RGB: 15-pin Mini-Dsub x 2	
HDMI input			HDMI x 1 (HDCP compliant)	
Audio output			RCA jack x 2 (L/R)	
Monitor output			Analog RGB: 15-pin Mini-Dsub x 1	
USB			USB type A x 1 (for PC-less presentation or wireless adapter), USB type B x 1 (for USB display or USB mouse control)	
Control			9-pin Dsub x 1 for RS232C	
Wireless network			Option	
Wired network (LAN)			RJ-45 x 1	
Mic. input			Mono Mini jack x 1 (compatible with dynamic microphones and unbalanced signal lines)	
Agency certifications			UL/cUL, FCC Part15 class B, AS/NZS CISPR22 class B, CE, GOST-R	
Dimensions (WxHxD)			317 x 98 x 288mm (12.48" x 3.86" x 11.34") [excluding protruding part]	
Weight			3.5kg (7.7 lbs.)	
Standard accessories			Remote control (Part#: HL02771) with two AA batteries, Power cord, Computer cable, Adapter cover, Lens cover, User's manuals, Security label, Application CD	
Optional accessories			Lamp: DT01021, Filter set: MU06481, Laser remote control: HL02651 (RC-R008), USB wireless adapter: USB-WL-11N	

PROJECTION DISTANCE

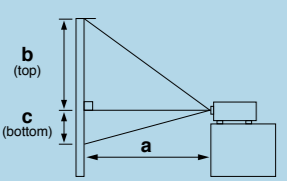


a: LCD projector-to-screen distance
b: Screen height from lens center to top
c: Screen height from lens center to bottom


CP-WX3014WN					CP-X4014WN/CP-X3014WN/CP-X2514WN				
Screen Size (16:10 Screen)	a Min	a Max	b (top)	c (bottom)	Screen Size (4:3 Screen)	a Min	a Max	b (top)	c (bottom)
30 type (inch), 0.8m	0.9m (35")	1.1m (43")	40cm (16")	1cm (0")	30 type (inch), 0.8m	0.8m (32")	1.0m (38")	41cm (16")	5cm (2")
40 type (inch), 1.0m	1.2m (48")	1.5m (58")	53cm (21")	1cm (0")	40 type (inch), 1.0m	1.1m (44")	1.3m (52")	55cm (22")	6cm (2")
50 type (inch), 1.3m	1.5m (61")	1.9m (74")	66cm (26")	1cm (1")	50 type (inch), 1.3m	1.4m (56")	1.7m (67")	69cm (27")	8cm (3")
60 type (inch), 1.5m	1.9m (73")	2.3m (89")	79cm (31")	2cm (1")	60 type (inch), 1.5m	1.7m (67")	2.0m (81")	82cm (32")	9cm (4")
70 type (inch), 1.8m	2.2m (86")	2.7m (105")	92cm (36")	2cm (1")	70 type (inch), 1.8m	2.0m (79")	2.4m (95")	96cm (38")	11cm (4")
80 type (inch), 2.0m	2.5m (99")	3.1m (121")	106cm (42")	2cm (1")	80 type (inch), 2.0m	2.3m (91")	2.8m (109")	110cm (43")	12cm (5")
90 type (inch), 2.3m	2.8m (112")	3.5m (136")	119cm (47")	2cm (1")	90 type (inch), 2.3m	2.6m (103")	3.1m (123")	123cm (49")	14cm (5")
100 type (inch), 2.5m	3.2m (125")	3.9m (152")	132cm (52")	3cm (1")	100 type (inch), 2.5m	2.9m (115")	3.5m (137")	137cm (54")	15cm (6")
120 type (inch), 3.0m	3.8m (151")	4.6m (183")	158cm (62")	3cm (1")	120 type (inch), 3.0m	3.5m (139")	4.2m (165")	165cm (65")	18cm (7")
150 type (inch), 3.8m	4.8m (190")	5.8m (229")	198cm (78")	4cm (2")	150 type (inch), 3.8m	4.4m (175")	5.3m (208")	206cm (81")	23cm (9")
200 type (inch), 5.1m	6.5m (254")	7.8m (307")	264cm (104")	5cm (2")	200 type (inch), 5.1m	6.0m (234")	7.1m (278")	274cm (108")	30cm (12")
250 type (inch), 6.4m	8.1m (319")	9.8m (385")	330cm (130")	7cm (3")	250 type (inch), 6.4m	7.5m (294")	8.9m (349")	343cm (135")	38cm (15")
300 type (inch), 7.6m	9.7m (383")	11.8m (463")	396cm (156")	8cm (3")	300 type (inch), 7.6m	9.0m (354")	10.7m (420")	411cm (162")	46cm (18")

* Tolerance ±10% (for projection distance a) • Final specifications may vary slightly.

DIMENSIONS

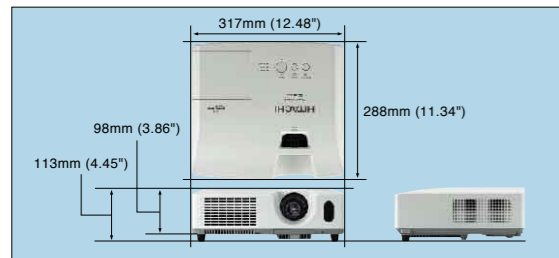

TERMINALS

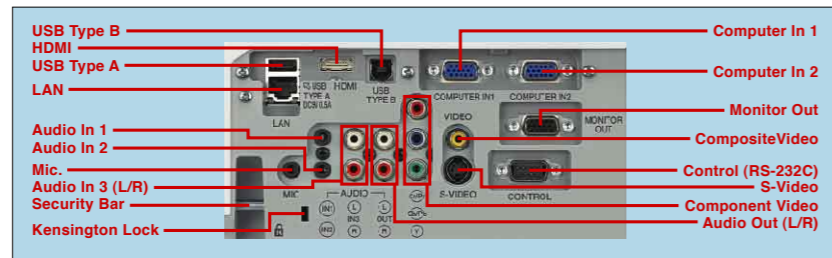

LCD Projectors

CP-WX3014WN/CP-X4014WN/ CP-X3014WN/CP-X2514WN

HITACHI
Inspire the Next



Wireless Capability

Using the optional USB wireless adapter, these projectors can be connected to a PC to establish a wireless network.



Wireless-Ready Projectors with Many Advanced Features



CP-WX3014WN WXGA 3,000 Lumens
CP-X4014WN XGA 4,000 Lumens
CP-X3014WN XGA 3,200 Lumens
CP-X2514WN XGA 2,700 Lumens



Projectors with wireless and wired network functions are highly practical for lessons and meetings



Optional USB wireless adapter

Advanced Network Functions

Wireless Capability


You can use a wireless network by connecting the projector to a PC using the optional USB wireless adapter. The adapter supports IEEE802.11b/g/n. Use the adapter cover to prevent the USB wireless adapter from coming off easily.



Campus Notification System


This function allows you to send text messages and beep alarm sounds simultaneously to all projectors on the network. It is an easy and efficient way to send campus-wide notifications.

* This function is not intended or guaranteed for the distribution of warning messages created by security systems.

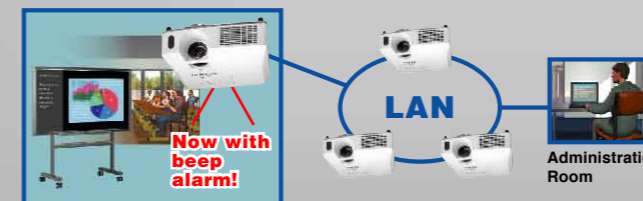

Multi Projector*1


You can project the same image to up to twelve*2 projectors simultaneously. This is useful for meetings and lectures in large venues where a single screen would not be sufficient.

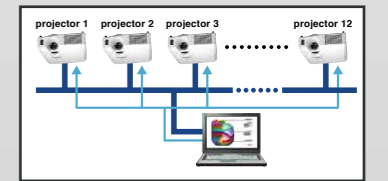

*1 This function will be provided later by software update from the website <http://www.hitachi-america.us/digitalmedia>
*2 Video transfer speed may vary depending on number of projectors connected.

Moderator Control Mode*

This mode lets you network 50 PCs to the projector, with one PC acting as the moderator. The teacher can use the moderator PC to select and project images from the students' PCs.

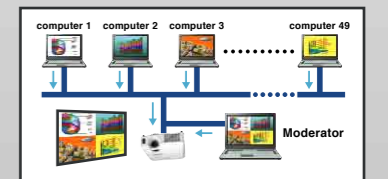

* This function will be provided later by software update from the website <http://www.hitachi-america.us/digitalmedia>

Hardware and software requirements for network capability

OS: One of the following. Windows® XP Home Edition/Professional Edition (32 bit version only), Windows Vista® Home Basic/Home Premium/Business/Ultimate/Enterprise (32 bit version only), Windows® 7 Starter/Home Basic/Home Premium/Professional/Ultimate/Enterprise (32 bit version only) **CPU:** Pentium® 4 (2.8 GHz or higher) **Graphic card:** 16 bit, XGA or higher (When using the "LiveViewer" it is recommended that the display resolution of your computer be set to 1024 x 768.) **Memory:** 512 MB or higher **Hard disk space:** 100 MB or higher **Web browser:** Internet Explorer® 6.0 or higher **CD-ROM drive**

Superior Convenient Features

3,000 :1 High Contrast Ratio (Presentation Mode)

WXGA (1280 x 800) and 720p Capability (CP-WX3014WN)

Featuring WXGA (1280 x 800) resolution, the CP-WX3014WN is capable of displaying wide and large images. (CP-X4014WN, CP-X3014WN and CP-X2514WN are XGA.)

High Brightness of 4,000 Lumens (CP-X4014WN)

The CP-X4014WN features high brightness of 4,000 lumens. (CP-X3014WN is 3,200 lumens, CP-WX3014WN is 3,000 lumens and CP-X2514WN is 2,700 lumens.)

PC-Less Presentation

By using a USB memory stick or other storage device*, you can use the projector without a PC. Menus are easy to see with a thumbnail display, and there is also a slideshow function.

* Not compatible with all USB storage devices.




- Beginning of slideshow
- Unplayable slides in slideshow
- End of slideshow

Mic. Input* and 16W Internal Speaker

The projectors are equipped with a microphone input, so you can use a microphone system, even when the projector is in standby condition. The projectors also have two built-in 8W high power speakers. * Compatible with dynamic microphones and unbalanced signal lines.

Inorganic LCD Panels

These projectors use three inorganic LCD panels, which feature higher resistance to light and offer high reliability. The use of double speed drive further improves picture quality.



HDMI Input

With signals transferred completely in the digital domain, lessons and presentations are assured of the highest image quality.



Hybrid Filter

The Hybrid Filter requires less frequent maintenance and cleaning, making long operation possible.




Display via USB

When you connect the projector and a PC via a USB cable, software in the projector runs automatically, letting you quickly and easily display images from the PC.

Easy Maintenance

The lamp door is on the top and the filter cover slides in and out from the front bottom, so maintenance and replacement of these parts can be done easily.



Template Function*

The Template function provides four types of lines, circles, and a world map with a center city that can be moved in 24-hour steps.

* Patent pending



Input Source Naming

The input source name can be changed to the name of a device you often use.



Auto Eco Mode

In Auto Eco mode, the projector always starts up in Eco mode, even if it was in Normal mode when turned off. This ensures that you will always save lamp life and power consumption.


Versatile Security Functions

The projectors are equipped with a security bar, PIN Lock, MyScreen Lock and Transition Detector functions.



Serial No. and MAC Address on Side Label

Serial number and MAC address are on the side label, in both normal position and upside-down.

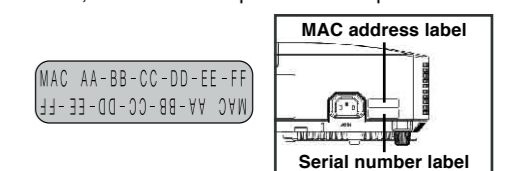

More Convenient Features

- Network Bridge • Centralized Reporting • E-mail Alerts • My Image (Image Transfer) • Audio Pass Through*1 • Power Saving Mode • Low Noise of 29dB*2 (ECO Mode) • Blackboard or Whiteboard Modes at Picture Setting • Daytime Mode • My Button • My Memory • Direct Power On/Off • Closed Caption • Auto Vertical Keystone Correction • Compatible with AMX Device Discovery • Compatible with Crestron RoomView™

*1 When in Normal mode at standby setting. It does not function in Saving mode.
*2 Typical. Tested in 23°C environmental conditions.